

User's Guide

The Bark Watch

Congratulations on purchasing a Bark Watch!
We hope it provides your family with peace of mind for years to come.



How to set up your Bark Watch

Step 1

Turn on  your Bark Watch


Long press the top right button to power it on.




Step 2

Connect the Bark Watch to Wi-Fi 

Step 3

With your phone, scan  the QR code that appears on the watch screen

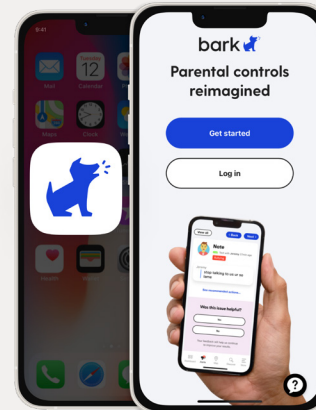

Step 4

Create an account or log in to manage settings

Need more help setting up your Bark Watch?

Read our [full guide](#).

Getting to know the buttons



How to turn the Bark Watch on and off

- Long-press (2+ seconds) the **upper side button** 1 to turn on/off the Bark Watch.

How to get to the home screen

- Short press (less than 2 seconds) the **upper side button** 1 to get to the home screen.

How to turn the display on/off

- When you're on the home screen, short pressing the **upper side button** 1 will turn the display on and off.
- Quickly pressing the **upper side button** 1 twice will pull up the camera.



How to open your contacts screen

- Quickly press the **bottom side button** 2 twice (2x) to bring up the contacts screen.

How to quickly call an emergency contact

- Long-press (2+ seconds) the **bottom side button** 2 to start calling your emergency contacts directly.
- Call the next emergency contact if the first call is not answered within 20 seconds.

How to open the emergency/medical ID screen

- Short-press (less than 2 seconds) the **bottom side button** 2 to enter the emergency/medical ID Screen.
- Then, press the **top button**  on the screen to begin calling emergency contacts. The watch will call the next emergency contact if the first call is not answered within 20 seconds.
- Press the **bottom button**  on the screen to view important medical information (this info can be updated in the watch settings menu).

How to contact 911 with the emergency button

- Short press the **upper side button** 1, then short-press the **bottom side button** 2 twice.
- This will bring up the 911 SOS call screen.
- Swipe right → to call 911.

Home screen functions

- 1 The Bark Watch has a touch screen.
- 2 Short press (less than 2 seconds) the **upper side button** to get to the home screen.
- 3 Swipe down ↓ from the home screen to get to the **quick settings menu**.
- 4 Swipe up ↑ from the home screen to see **notifications**.
- 5 Swipe right → from the home screen to get to app screens.
- 6 Swipe left ← from the home screen to get to app list.
- 7 Swipe right → on any screen to reverse an action or go back to the previous screen.
- 8 Long press (3+ seconds) on the home screen to change the **Watch Face**.



Accessing apps

Contacts

Swipe left ← from the home screen and tap **contacts**.

Camera

Swipe left ← from the home screen and tap **camera** or tap the upper side button twice.

Message

Swipe left ← from the home screen and tap **message** to send/view texts.

Clock

Swipe left ← from the home screen and tap **clock** to set reminders, tasks, timers or use stopwatch.

Dialer

Swipe left ← from the home screen and tap **dialer** to get to the phone keypad.



Gallery

Swipe left ← from the home screen and tap **gallery** to view your pictures or videos.



Settings

Swipe left ← from the home screen and tap **settings**.


How to charge your Bark Watch


- Plug the wall charger  into an electrical outlet.
- Plug the USB connector  into your watch's wall charger and connect the charging block with magnets to the back of the watch.

Keep in mind:

- Before using your device, please fully charge  it for 2 hours.
- Don't let it charge more than 5 hours  to save battery life.
- Make sure the gold connector pads and magnetic charging pins stay clean.

Battery

The Bark Watch has a non-removable battery . **Don't attempt to remove the battery or try to disassemble it** as this could result in personal injury, safety hazard, damage to the battery or the device. Trying to remove the battery will void the warranty.

Note: Never expose the battery to temperatures  higher than 140°F (60°C).